



| 仕様              | 单位              | CXMG-150 |
|-----------------|-----------------|----------|
| 合模力             | kN              | 1500     |
| 动模行程            | mm              | 380      |
| 装模板尺寸 ( 竖×横 )   | mm              |          |
| 连接柱内尺寸 ( 竖×横 )  | mm              | 460×460  |
| 模具最大厚/最小厚       | mm              | 500/200  |
| 连接柱径            | mm              |          |
| 顶出力             | kN              | 87       |
| 顶出行程            | mm              | 90       |
| 射出力             | kN              | 83       |
| 射出行程            | mm              | 200      |
| 射出柱塞直径          | mm              | Φ60/Φ65  |
| 喷嘴接嘴力           | kN              | 72       |
| 喷嘴接嘴行程          | mm              | 250      |
| 铸造压力            | MPa             | 29.7     |
| 可铸面积 ( 效率100% ) | cm <sup>2</sup> | 496      |
| 可铸重量 ( 效率60% )  | g               | 610      |
| 常用压力            | MPa             | 10.5     |
| 电动机容量           | kw              | 18.5     |
| 操作电源容量          | kVA             | 27.5     |
| 坩埚容量            | kg              | 250      |
| 油缸容量            | L               |          |
| 机械重量            | ton             | 8.5      |


# CXMG-600

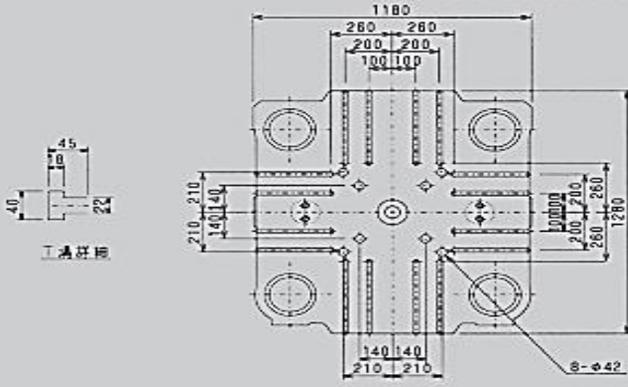

可動盤 MOVABLE PLATEN

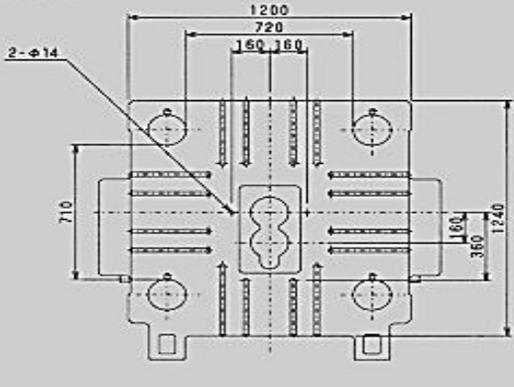

固定盤 FIXED PLATEN

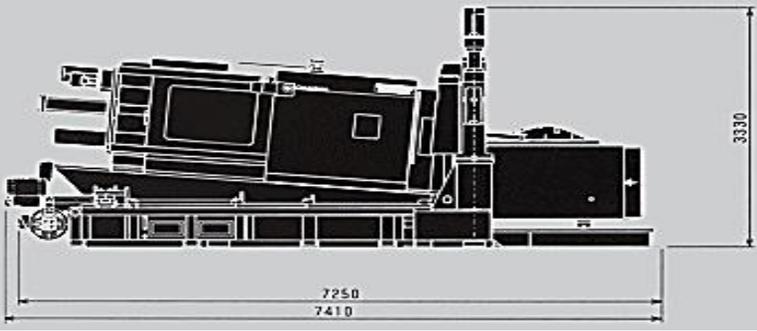

## CXMG-60/150/250/350 (mm)

|     | CXMG-60 | CXMG-150 | CXMG-250 | CXMG-350 |
|-----|---------|----------|----------|----------|
| [1] | 488     | 720      | 870      | 950      |
| [2] | 330     | 460      | 530      | 600      |
| [3] | 65      | 100      | 125      | 150      |
| [4] | 58      | 85       | 110      | 125      |
| [5] | 4500    | 5000     | 5400     | 6675     |
| [6] | 2000    | 2550     | 2550     | 2570     |
| [7] | 2350    | 2520     | 2780     | 3100     |

