



仕 様	单位	CXMG-350
合模力	kN	3500
动模行程	mm	500
装模板尺寸 (竖×横)	mm	950×950
连接柱内尺寸 (竖×横)	mm	600×600
模具最大厚/最小厚	mm	700/300
连接柱径	mm	Φ125
顶出力	kN	190
顶出行程	mm	120
射出力	kN	165
射出行程	mm	230
射出柱塞直径	mm	Φ80/Φ90
喷嘴接嘴力	kN	89
喷嘴接嘴行程	mm	400
铸造压力	MPa	32.8
可铸面积 (效率100%)	cm ²	1067
可铸重量 (效率60%)	g	1200
常用压力	MPa	14
电动机容量	kw	22
操作电源容量	kVA	35
坩埚容量	kg	500
油缸容量	L	
机械重量	ton	16



CXMG-600

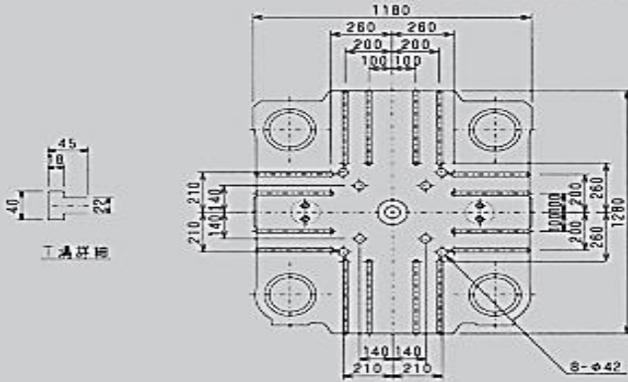

可動盤 MOVABLE PLATEN

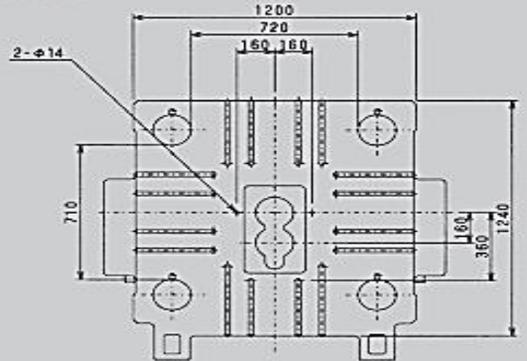

固定盤 FIXED PLATEN

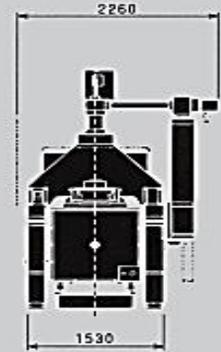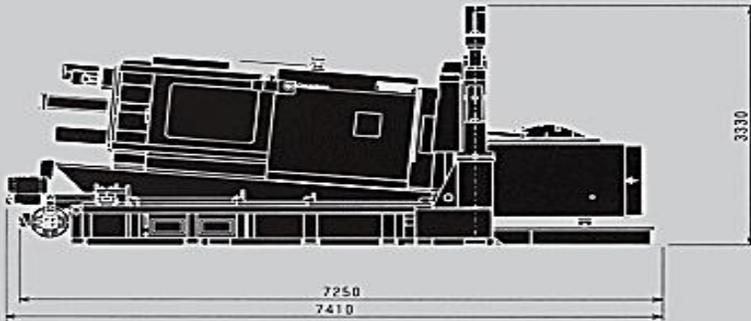

CXMG-60/150/250/350 (mm)

	CXMG-60	CXMG-150	CXMG-250	CXMG-350
[1]	488	720	870	950
[2]	330	460	530	600
[3]	65	100	125	150
[4]	58	85	110	125
[5]	4500	5000	5400	6675
[6]	2000	2550	2550	2570
[7]	2350	2520	2780	3100

