



仕様	單位	CXMG-350
合模力	kN	3500
動模行程	mm	500
裝模板尺寸 ( 豎×橫 )	mm	950×950
連接柱內尺寸 ( 豎×橫 )	mm	600×600
模具最大厚/最小厚	mm	700/300
連接柱徑	mm	Φ125
頂出力	kN	190
頂出行程	mm	120
射出力	kN	165
射出行程	mm	230
射出柱塞直徑	mm	Φ80/Φ90
噴嘴接嘴力	kN	89
噴嘴接嘴行程	mm	400
鑄造壓力	MPa	32.8
可鑄面積 ( 效率100% )	cm <sup>2</sup>	1067
可鑄重量 ( 效率60% )	g	1200
常用壓力	MPa	14
電動機容量	kw	22
操作電源容量	kVA	35
坩鍋容量	kg	500
油缸容量	L	
機械重量	ton	16



# CXMG-600

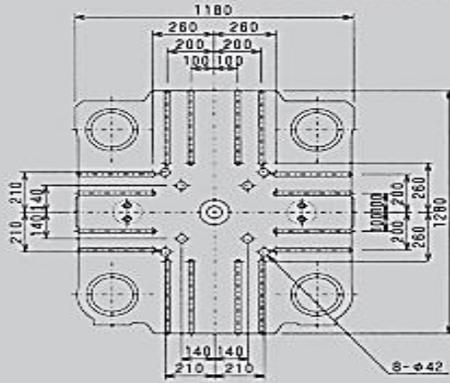

可動盤 MOVABLE PLATEN

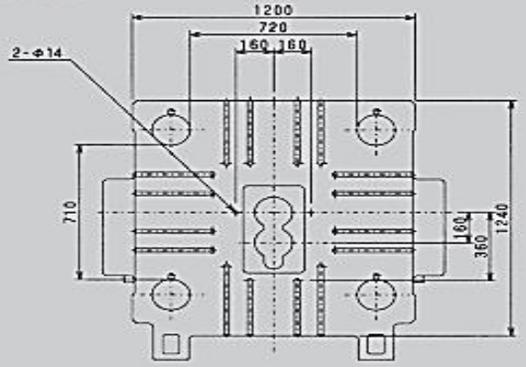

固定盤 FIXED PLATEN

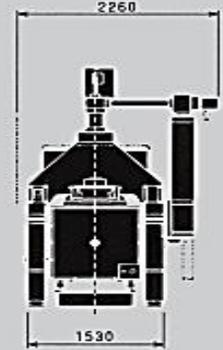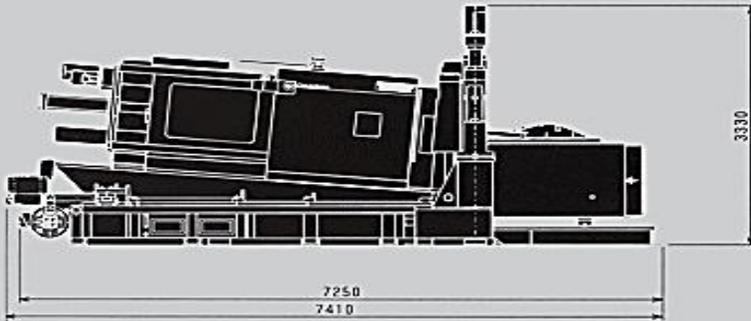

## CXMG-60/150/250/350 (mm)

	CXMG-60	CXMG-150	CXMG-250	CXMG-350
[1]	488	720	870	950
[2]	330	460	530	600
[3]	65	100	125	150
[4]	58	85	110	125
[5]	4500	5000	5400	6675
[6]	2000	2550	2550	2570
[7]	2350	2520	2780	3100

